




### BAG STYLES:



QUAD-SEAL  
/FLAT-BOTTOM



PILLOW STYLE



BRICK FOLD-DOWN  
/TAPE-DOWN



GUSSETED



STANDUP w/  
HANDLE



EUROSLOT/  
HOLE PUNCH

### MAXIMUM SPEED:

Up to **120** cycles  
per minute

### MAXIMUM BAG SIZE:

400 mm x 600 mm  
(15.75" x 23.62")

### MINIMUM BAG SIZE:

100 mm x 100 mm  
(3.94" x 3.94")

### VIKING MASEK VFFS

E250

E400

ES400

M250

M250 BiB

M400

M500

M650

S250

**\$400**

SACHET SA300-SA500

SIGMA

STICK PACK ST200-ST800

VELOCITY

**ROBUST, SERVO-DRIVEN VERTICAL BAGGER THAT DELIVERS SPEED,  
FLEXIBILITY, AND VALUE!**



## FEATURES:


- Robust, stainless steel frame
- Enclosed, servo-drive jaw actuation
- Quiet running speeds up to 120 cycles per minute
- Off-the-shelf components
- Minimal maintenance requirements
- No tool changeover
- Self-centering pull belts
- Automatic film tracking
- VFD powered film unwind
- Quick film splice table
- Product stagers
- End-seal cooling air
- Bag deflators
- Photo eye and encoder
- Double guard door
- Jaw obstruction detection
- Runs most film structures
- Siemens control platform
- Storage for 50 product recipes

## OPTIONS:


- Quad seal bag assembly
- Flat bottom bag assembly
- Siemens or Allen Bradley control platform
- Impulse sealing for poly film structures
- Integration with variety of fillers, printers, metal detectors, label applicators, and checkweighers
- Washdown construction
- Vacuum pull belts
- Fold-down/tape-down unit
- Hole punch (Euroslot and Round)
- Carry-handle punch
- Load shelf
- Product settler
- Gas flush
- Static eliminator
- Tear notch
- Degassing valve applicator
- In-feed and take-away conveyors
- Remote diagnostics

## S400 VIEWS:


FRONT

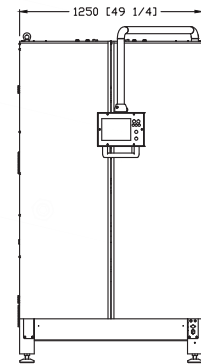

SIDE

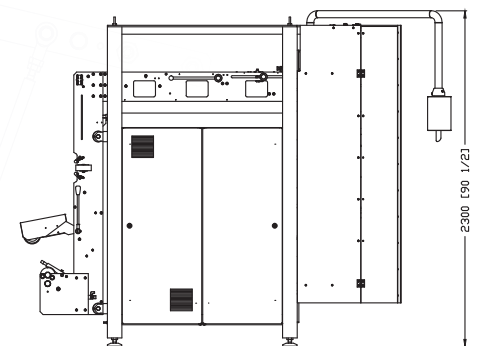

TOP

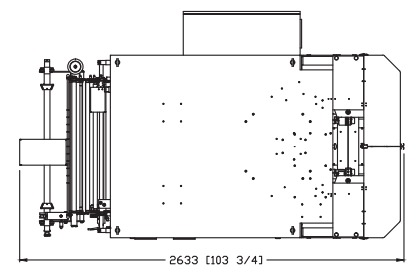

Standard views, dimensions may vary.

